CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 2061

SPECfp_base2000 = 1725

SPEC license #00407	Tested by: Vladimir Makarov	Test date: Jun 18, 2021	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	95.9	1669	76.1	2101
171.swim	3100	129	2403	138	2243
172.mgrid	1800	170	1060	147	1227
173.applu	2100	158	1329	162	1294
177.mesa	1400	116	1203	64.6	2166
178.galgel	2900	69.7	4160	62.1	4673
179.art	2600	43.0	6040	35.4	7351
183.equake	1300	63.1	2059	60.2	2161
187.facerec	1900	111	1710	65.6	2895
188.ammp	2200	150	1467	137	1607
189.lucas	2000	124	1619	106	1885
191.fma3d	2100	146	1438	123	1704
200.sixtrack	1100	153	719	113	969
301.apsi	2600	186	1401	181	1436

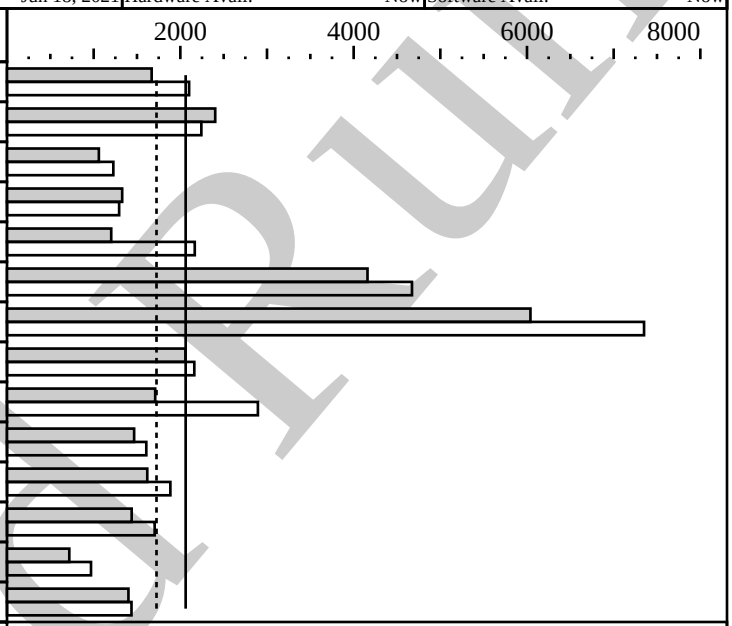

Hardware

CPU:	Genuine Intel(R) CPU @ 2.66GHz
CPU MHz:	2666.449
FPU:	Integrated
CPU(s) enabled:	4
CPU(s) orderable:	
Parallel:	No
Primary Cache:	
Secondary Cache:	4096 KB
L3 Cache:	
Other Cache:	
Memory:	4036100 kB
Disk Subsystem:	
Other Hardware:	

Software

Operating System:	Linux 5.1.16-200.fc29.x86_64
Compiler:	gcc version 12.0.0 20210618 (experimental) (GCC)
File System:	
System State:	multiuser

Notes/Tuning Information

```
Base flags: -O2 -mtune=generic -m32
Peak flags: -Ofast -flto -m32
```

Errors

'reportable' flag not set during run

Invalid Run