CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 2062

SPECfp_base2000 = 1723

SPEC license #00407	Tested by: Vladimir Makarov	Test date: Jun 22, 2021	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	95.8	1669	76.3	2096
171.swim	3100	129	2401	138	2246
172.mgrid	1800	170	1060	147	1228
173.applu	2100	158	1329	160	1316
177.mesa	1400	118	1189	63.9	2190
178.galgel	2900	69.8	4152	62.0	4676
179.art	2600	42.8	6079	36.6	7110
183.equake	1300	63.2	2058	60.1	2163
187.facerec	1900	111	1715	65.8	2888
188.ammp	2200	149	1474	135	1625
189.lucas	2000	124	1616	106	1885
191.fma3d	2100	147	1425	125	1682
200.sixtrack	1100	154	714	112	978
301.apsi	2600	185	1405	181	1438

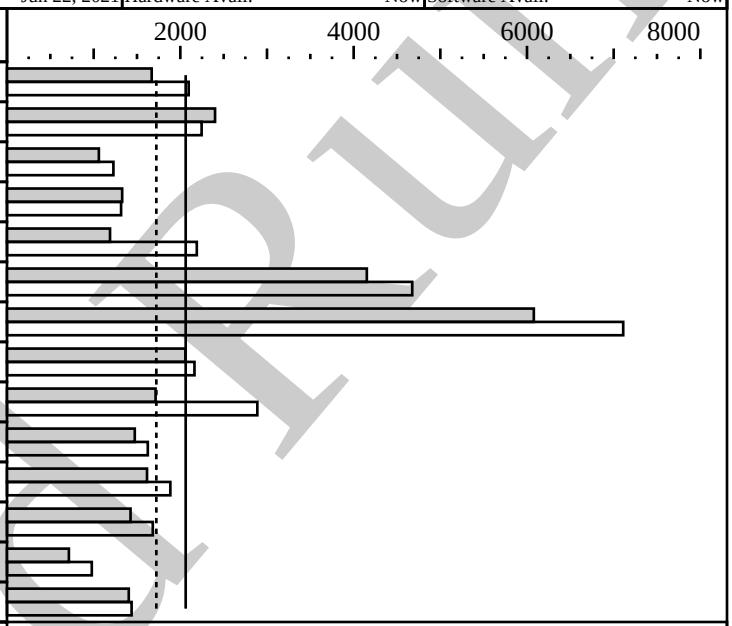

Hardware

CPU:	Genuine Intel(R) CPU @ 2.66GHz
CPU MHz:	2666.489
FPU:	Integrated
CPU(s) enabled:	4
CPU(s) orderable:	
Parallel:	No
Primary Cache:	
Secondary Cache:	4096 KB
L3 Cache:	
Other Cache:	
Memory:	4036100 kB
Disk Subsystem:	
Other Hardware:	

Software

Operating System:	Linux 5.1.16-200.fc29.x86_64
Compiler:	gcc version 12.0.0 20210622 (experimental) (GCC)
File System:	
System State:	multiuser

Notes/Tuning Information

```
Base flags: -O2 -mtune=generic -m32
Peak flags: -Ofast -flto -m32
```

Errors

'reportable' flag not set during run

Invalid Run