

SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation


(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991
Test Sponsor: Red Hat, Inc.
Tested by: Vladimir Makarov

Test Date: Jun-2021
Hardware Availability: Now
Software Availability:

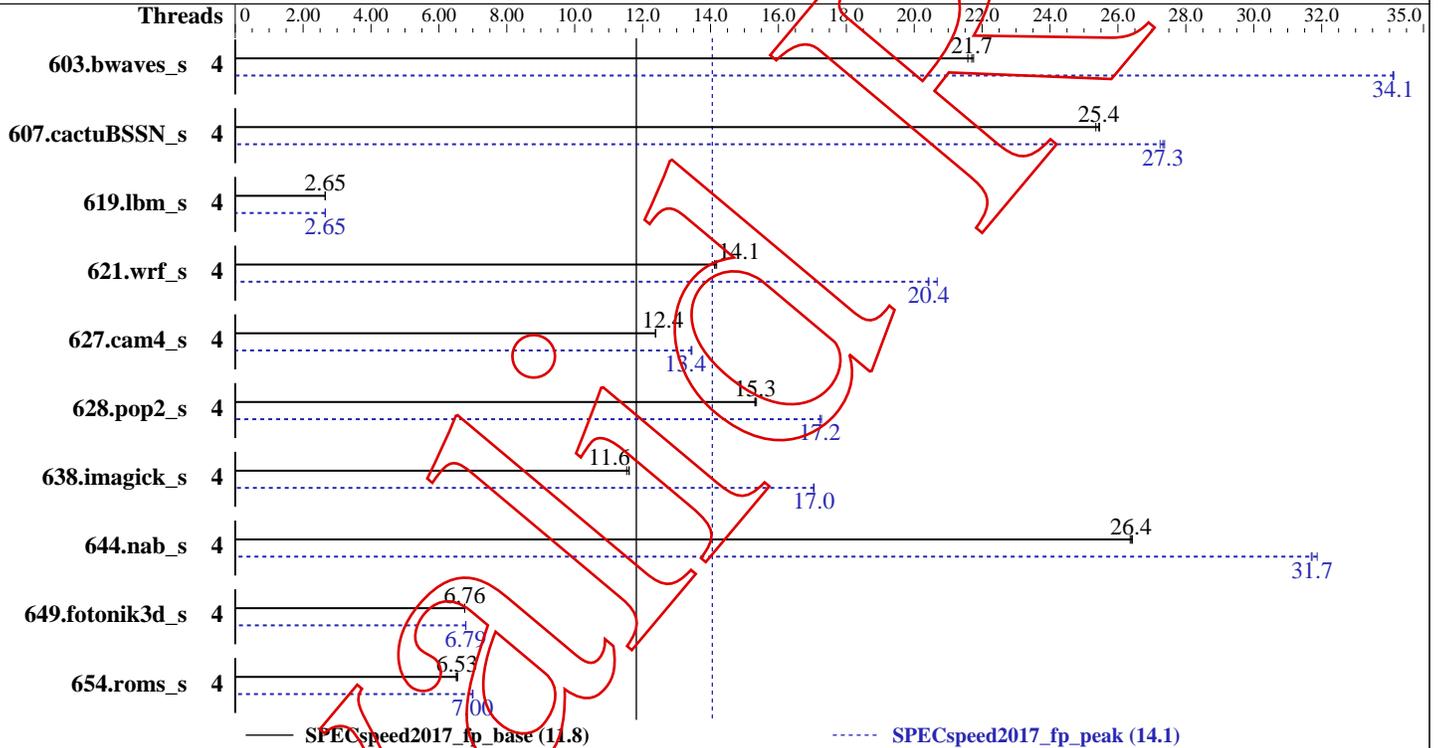

Hardware

CPU Name: Intel(R) Core(TM) i7-8700K CPU @ 3.70GHz
Max MHz.:
Nominal: 4129.370
Enabled: 6 cores, 1 chip, threads/core
Orderable:
Cache L1:
L2: 12288 KB
L3:
Other:
Memory: 16300620 KB
'N GB (M x N GB nRxn PCn-nnnnnR-n, ECC)'
Storage: 192 GB add more disk info here
Other:

Software

OS: Linux 4.17.3-200.fc28.x86_64
4.17.3-200.fc28.x86_64
Compiler: gcc version 12.0.0 20210613 (experimental) (GCC)
Parallel: Yes
Firmware:
File System: ext4
System State: multiuser
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other:

Errors

'reportable' flag not set during run
Unknown flags were used! See
<https://www.spec.org/cpu2017/Docs/runcpu.html#flagsurl>
for information about how to get rid of this error.

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECSpeed2017_fp_base = **11.8**

SPECSpeed2017_fp_peak = **14.1**

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|-----------------|---------|------------|-------------|-------------|-------------|-------------|-------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 4 | 2713 | 21.7 | 2734 | 21.6 | 2719 | 21.7 | 4 | 1729 | 34.1 | 1730 | 34.1 | 1730 | 34.1 |
| 607.cactuBSSN_s | 4 | 655 | 25.5 | 658 | 25.3 | 655 | 25.4 | 4 | 612 | 27.2 | 609 | 27.4 | 610 | 27.3 |
| 619.lbm_s | 4 | 1976 | 2.65 | 1975 | 2.65 | 1975 | 2.65 | 4 | 1974 | 2.65 | 1974 | 2.65 | 1974 | 2.65 |
| 621.wrf_s | 4 | 933 | 14.2 | 936 | 14.1 | 937 | 14.1 | 4 | 640 | 20.7 | 648 | 20.4 | 647 | 20.4 |
| 627.cam4_s | 4 | 716 | 12.4 | 715 | 12.4 | 716 | 12.4 | 4 | 660 | 13.4 | 660 | 13.4 | 659 | 13.5 |
| 628.pop2_s | 4 | 775 | 15.3 | 776 | 15.3 | 773 | 15.4 | 4 | 689 | 17.2 | 688 | 17.3 | 689 | 17.2 |
| 638.imagick_s | 4 | 1243 | 11.6 | 1244 | 11.6 | 1251 | 11.5 | 4 | 847 | 17.0 | 846 | 17.1 | 846 | 17.0 |
| 644.nab_s | 4 | 662 | 26.4 | 661 | 26.4 | 663 | 26.4 | 4 | 551 | 31.7 | 548 | 31.9 | 551 | 31.7 |
| 649.fotonik3d_s | 4 | 1348 | 6.76 | 1349 | 6.76 | 1349 | 6.76 | 4 | 1343 | 6.79 | 1343 | 6.79 | 1342 | 6.79 |
| 654.roms_s | 4 | 2403 | 6.55 | 2411 | 6.53 | 2419 | 6.51 | 4 | 2250 | 7.00 | 2249 | 7.00 | 2254 | 6.98 |

SPECSpeed2017_fp_base = **11.8**

SPECSpeed2017_fp_peak = **14.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Environment variables set by /runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/lib64:/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/lib::usr/lib64:/usr/lib/::lib64"
OMP_STACKSIZE = "120M"
```

Platform Notes

```
Sysinfo program /notnfs/vmakarov/spec2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on ton8 Sun Jun 13 09:08:03 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Core(TM) i7-8700K CPU @ 3.70GHz
1 "physical id"s (chips)
6 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
```

From lscpu:

```
Architecture: x86_64
```

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Platform Notes (Continued)

```
CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              6
On-line CPU(s) list: 0-5
Thread(s) per core: 1
Core(s) per socket: 6
Socket(s):           1
NUMA node(s):       1
Vendor ID:           GenuineIntel
CPU family:          6
Model:               158
Model name:          Intel(R) Core(TM) i7-8700K CPU @ 3.70GHz
Stepping:            10
CPU MHz:             4700.031
CPU max MHz:         4700.0000
CPU min MHz:         800.0000
BogoMIPS:            7392.00
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            256K
L3 cache:            12288K
NUMA node0 CPU(s):  0-5
Flags:               fpu_vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault invpcid_single pti
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt
xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_opp
```

```
/proc/cpuinfo cache data
cache size : 12288 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
From /proc/meminfo
MemTotal:      16300620 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
fedora-release: Fedora release 28 (Twenty Eight)
os-release:
```

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Platform Notes (Continued)

```
NAME=Fedora
VERSION="28 (Workstation Edition)"
ID=fedora
VERSION_ID=28
PLATFORM_ID="platform:f28"
PRETTY_NAME="Fedora 28 (Workstation Edition)"
ANSI_COLOR="0;34"
CPE_NAME="cpe:/o:fedoraproject:fedora:28"
redhat-release: Fedora release 28 (Twenty Eight)
system-release: Fedora release 28 (Twenty Eight)
system-release-cpe: cpe:/o:fedoraproject:fedora:28
```

```
uname -a:
Linux ton8 4.17.3-200.fc28.x86_64 #1 SMP Tue Jun 26 14:17:07 UTC 2018 x86_64 x86_64
x86_64 GNU/Linux
```

```
SPEC is set to: /notnfs/vmakarov/spec2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/fedora-home ext4    192G   51G  132G  28% /notnfs
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The "dmidecode" program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
FC 607.cactuBSSN.s(base, peak)  
=====
```

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/g++

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Compiler Version Notes (Continued)

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gcc

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gfortran

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

=====
CC 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gcc

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Compiler Version Notes (Continued)

FC 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gfortran

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

CC 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gfortran

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

Using built-in specs.

COLLECT_GCC=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/bin/gcc

COLLECT_LTO_WRAPPER=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8/libexec/gcc/x86_64-pc-linux-gnu/12.0.0/lto-wrapper

Target: x86_64-pc-linux-gnu

Configured with:

```
/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src/configure
--prefix=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/inst.ton8
--srcdir=/notnfs/vmakarov/perf/sbox/gcc/local.spec2017.x86_64/src
--disable-bootstrap --disable-libcilkrts --enable-checking=release
--enable-languages=c,c++,fortran
```

Thread model: posix

Supported LTO compression algorithms: zlib

gcc version 12.0.0 20210613 (experimental) (GCC)

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991
Test Sponsor: Red Hat, Inc.
Tested by: Vladimir Makarov

Test Date: Jun-2021
Hardware Availability: Now
Software Availability:

Compiler Version Notes (Continued)

Base Unknown Flags

603.bwaves_s: "-fallow-argument-mismatchARRAY(0x8cb99f0)
"-fallow-argument-mismatchARRAY(0x8cb7d30)

607.cactuBSSN_s: "-fcommonARRAY(0x8c85b60) "-fcommonARRAY(0x8cc42e8)
"-fallow-argument-mismatchARRAY(0x8cd5348)
"-fcommonARRAY(0x8cdbf88)

619.lbm_s: "-fcommonARRAY(0x8c858d8) "-fcommonARRAY(0x8cbe5c0)

621.wrf_s: "-fallow-argument-mismatchARRAY(0x8cba578)
"-fcommonARRAY(0x8cd9b10)
"-fallow-argument-mismatchARRAY(0x8ce5160)

627.cam4_s: "-fallow-argument-mismatchARRAY(0x8c9d188)
"-fcommonARRAY(0x8e07360)
"-fallow-argument-mismatchARRAY(0x8ce53e8)

628.pop2_s: "-fallow-argument-mismatchARRAY(0x8e064d8)
"-fcommonARRAY(0x8e05118)
"-fallow-argument-mismatchARRAY(0x8e054a8)

638.imagick_s: "-fcommonARRAY(0x8cdb910) "-fcommonARRAY(0x8e07030)

644.nab_s: "-fcommonARRAY(0x8e082b8) "-fcommonARRAY(0x8e09b58)

649.fotonik3d_s: "-fallow-argument-mismatchARRAY(0x8cba3f8)
"-fallow-argument-mismatchARRAY(0x8d86ad0)

654.roms_s: "-fallow-argument-mismatchARRAY(0x8e09480)
"-fallow-argument-mismatchARRAY(0x8e0c0e0)

Peak Unknown Flags

603.bwaves_s: "-fallow-argument-mismatchARRAY(0x8cb99f0)
"-fallow-argument-mismatchARRAY(0x8cb7d30)

607.cactuBSSN_s: "-fcommonARRAY(0x8c85b60) "-fcommonARRAY(0x8cc42e8)
"-fallow-argument-mismatchARRAY(0x8cd5348)
"-fcommonARRAY(0x8cdbf88)

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Peak Unknown Flags (Continued)

619.lbm_s: "-fcommonARRAY(0x8c858d8) "-fcommonARRAY(0x8cbe5c0)

621.wrf_s: "-fallow-argument-mismatchARRAY(0x8cba578)

"-fcommonARRAY(0x8cd9b10)

"-fallow-argument-mismatchARRAY(0x8ce5160)

627.cam4_s: "-fallow-argument-mismatchARRAY(0x8c9d188)

"-fcommonARRAY(0x8e07360)

"-fallow-argument-mismatchARRAY(0x8ce53e8)

628.pop2_s: "-fallow-argument-mismatchARRAY(0x8e064d8)

"-fcommonARRAY(0x8e05118)

"-fallow-argument-mismatchARRAY(0x8e054a8)

638.imagick_s: "-fcommonARRAY(0x8cdb910) "-fcommonARRAY(0x8e07030)

644.nab_s: "-fcommonARRAY(0x8e082b8) "-fcommonARRAY(0x8e09b58)

649.fotonik3d_s: "-fallow-argument-mismatchARRAY(0x8cba3f8)

"-fallow-argument-mismatchARRAY(0x8d86ad0)

654.roms_s: "-fallow-argument-mismatchARRAY(0x8e09480)

"-fallow-argument-mismatchARRAY(0x8e0c0e0)

603.bwaves_s: "-fallow-argument-mismatchARRAY(0x8e05940)

"-fallow-argument-mismatchARRAY(0x8e0fcf8)

"-fltoARRAY(0x8e6af60)

607.cactuBSSN_s: "-fcommonARRAY(0x8e0acf0) "-fcommonARRAY(0x8e5f038)

"-fallow-argument-mismatchARRAY(0x8e61ed8)

"-fcommonARRAY(0x8e64f60) "-fltoARRAY(0x8e5bd78)

619.lbm_s: "-fcommonARRAY(0x8d85888) "-fcommonARRAY(0x8e65260)

"-fltoARRAY(0x8e657e8)

621.wrf_s: "-fallow-argument-mismatchARRAY(0x8e2ece0)

"-fcommonARRAY(0x8e62538)

"-fallow-argument-mismatchARRAY(0x8e62520)

"-fltoARRAY(0x8e6a8e8)

627.cam4_s: "-fallow-argument-mismatchARRAY(0x8e6b590)

"-fcommonARRAY(0x8d7d468)

"-fallow-argument-mismatchARRAY(0x8e6a990)

"-fltoARRAY(0x8e6a740)

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Peak Unknown Flags (Continued)

628.pop2_s: "-fallow-argument-mismatchARRAY(0x8e65650)

"-fcommonARRAY(0x8e6aa08)

"-fallow-argument-mismatchARRAY(0x8e66950)

"-flttoARRAY(0x8e677a8)

638.imagick_s: "-fcommonARRAY(0x8e65338) "-fcommonARRAY(0x8e65158)

"-flttoARRAY(0x8e755b0)

644.nab_s: "-fcommonARRAY(0x8e62b38) "-fcommonARRAY(0x8e6aa80)

"-flttoARRAY(0x8e77538)

649.fotonik3d_s: "-fallow-argument-mismatchARRAY(0x8e5bda8)

"-fallow-argument-mismatchARRAY(0x8e66d88)

"-flttoARRAY(0x8e78048)

654.roms_s: "-fallow-argument-mismatchARRAY(0x8e65ad0)

"-fallow-argument-mismatchARRAY(0x8e75820)

"-flttoARRAY(0x8e78b80)

Base Compiler Invocation

C benchmarks:

gcc

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64

(Continued on next page)

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-O2 -mtune=generic -fopenmp -DSPEC_OPENMP

Fortran benchmarks:

-O2 -mtune=generic -DSPEC_OPENMP -fopenmp

Benchmarks using both Fortran and C:

-O2 -mtune=generic -DSPEC_OPENMP -fopenmp

Benchmarks using Fortran, C, and C++:

-O2 -mtune=generic -fopenmp -DSPEC_OPENMP

Peak Compiler Invocation

C benchmarks:

gcc

Fortran benchmarks:

gfortran

Benchmarks using both Fortran and C:

gfortran gcc

Benchmarks using Fortran, C, and C++:

g++ gcc gfortran

Peak Portability Flags

Same as Base Portability Flags

SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

(Test Sponsor: Red Hat, Inc.)

SPECspeed2017_fp_base = 11.8

SPECspeed2017_fp_peak = 14.1

CPU2017 License: 0002991

Test Sponsor: Red Hat, Inc.

Tested by: Vladimir Makarov

Test Date: Jun-2021

Hardware Availability: Now

Software Availability:

Peak Optimization Flags

C benchmarks:

-Ofast -mtune=corei7 -march=core-avx2 -fopenmp -DSPEC_OPENMP

Fortran benchmarks:

603.bwaves_s: -Ofast -mtune=corei7 -march=core-avx2 -DSPEC_OPENMP
-fopenmp -fno-stack-arrays

649.fotonik3d_s: -Ofast -mtune=corei7 -march=core-avx2 -DSPEC_OPENMP
-fopenmp

654.roms_s: Same as 649.fotonik3d_s

Benchmarks using both Fortran and C:

-Ofast -mtune=corei7 -march=core-avx2 -DSPEC_OPENMP -fopenmp

Benchmarks using Fortran, C, and C++:

-Ofast -mtune=corei7 -march=core-avx2 -fopenmp -DSPEC_OPENMP

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.1 on 2021-06-13 09:08:03-0400.

Report generated on 2021-06-14 05:46:39 by CPU2017 PDF formatter v5748.