CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 1104

SPECfp_base2000 = 988

SPEC license #00407	Tested by: Vladimir Makarov	Test date: May 10, 2017	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	159	1005	102	1571
171.swim	3100	337	920	344	900
172.mgrid	1800	332	543	255	706
173.applu	2100	230	912	195	1075
177.mesa	1400	93.4	1499	91.8	1526
178.galgel	2900	X	X	X	X
179.art	2600	136	1909	129	2012
183.equake	1300	184	708	164	794
187.facerec	1900	174	1095	122	1552
188.ammp	2200	237	928	227	970
189.lucas	2000	127	1572	123	1628
191.fma3d	2100	202	1040	193	1086
200.sixtrack	1100	198	555	239	460
301.apsi	2600	259	1004	229	1134

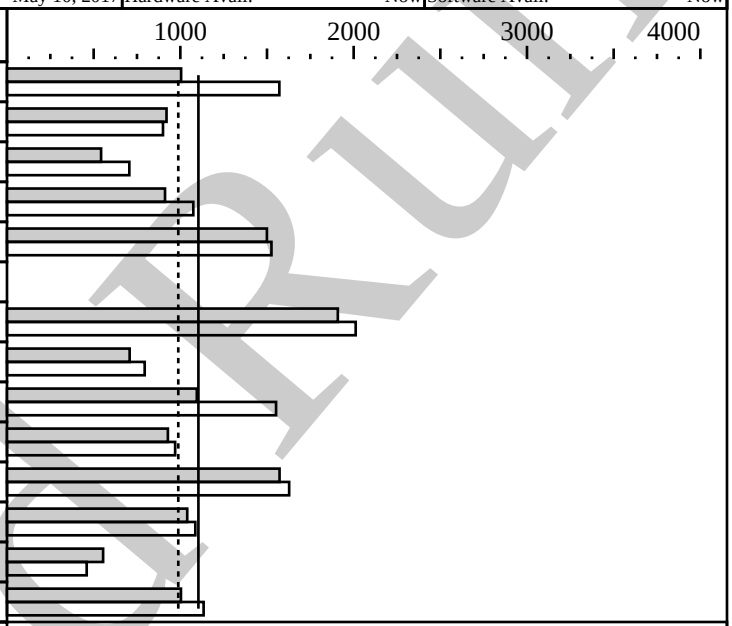

Hardware

CPU:	ARMv7Processorrev3(v7l)
CPU MHz:	
FPU:	Integrated
CPU(s) enabled:	8
CPU(s) orderable:	
Parallel:	No
Primary Cache:	
Secondary Cache:	
L3 Cache:	
Other Cache:	
Memory:	2038764kB
Disk Subsystem:	
Other Hardware:	

Software

Operating System:	Linux 3.10.82-39
Compiler:	gcc version 8.0.0 20170511 (experimental) (GCC)
File System:	
System State:	multiuser

Notes/Tuning Information

```
Base flags: -O2
Peak flags: -Ofast -flto -mtune=native
```

Errors

'reportable' flag not set during run

Invalid Run