CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 1170

SPECfp_base2000 = 1059

SPEC license #00407	Tested by: Vladimir Makarov	Test date: May 18, 2017	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	149	1074	99.4	1610
171.swim	3100	338	917	323	961
172.mgrid	1800	335	537	258	697
173.applu	2100	227	926	193	1090
177.mesa	1400	93.1	1504	91.4	1531
178.galgel	2900	131	2219	129	2253
179.art	2600	137	1899	127	2052
183.equake	1300	174	749	168	774
187.facerec	1900	174	1095	122	1553
188.ammp	2200	237	929	226	972
189.lucas	2000	127	1569	123	1624
191.fma3d	2100	194	1082	192	1095
200.sixtrack	1100	198	555	240	459
301.apsi	2600	258	1007	230	1131

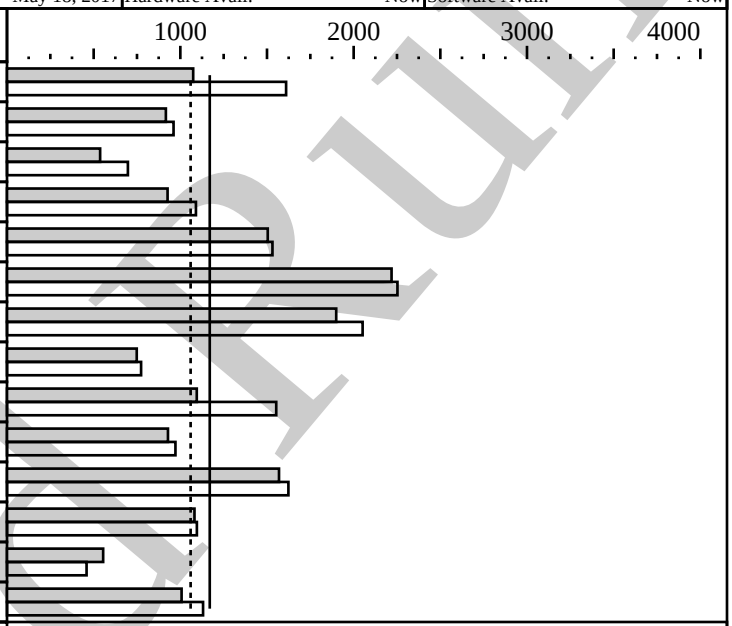

Hardware

CPU:	ARMv7Processorrev3(v7l)
CPU MHz:	
FPU:	Integrated
CPU(s) enabled:	8
CPU(s) orderable:	
Parallel:	No
Primary Cache:	
Secondary Cache:	
L3 Cache:	
Other Cache:	
Memory:	2038764kB
Disk Subsystem:	
Other Hardware:	

Software

Operating System:	Linux 3.10.82-39
Compiler:	gcc version 8.0.0 20170519 (experimental) (GCC)
File System:	
System State:	multiuser

Notes/Tuning Information

```
Base flags: -O2
Peak flags: -Ofast -flto -mtune=native
```

Errors

'reportable' flag not set during run

Invalid Run