CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 1168

SPECfp_base2000 = 1062

SPEC license #00407	Tested by: Vladimir Makarov	Test date: May 29, 2017	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	150	1068	98.9	1617
171.swim	3100	338	917	324	957
172.mgrid	1800	334	539	258	697
173.applu	2100	225	934	193	1089
177.mesa	1400	93.1	1503	92.7	1511
178.galgel	2900	131	2215	128	2272
179.art	2600	136	1912	128	2024
183.equake	1300	174	749	164	790
187.facerec	1900	174	1095	122	1551
188.ammp	2200	237	928	226	974
189.lucas	2000	127	1576	123	1630
191.fma3d	2100	190	1106	197	1068
200.sixtrack	1100	198	555	240	458
301.apsi	2600	258	1009	228	1139

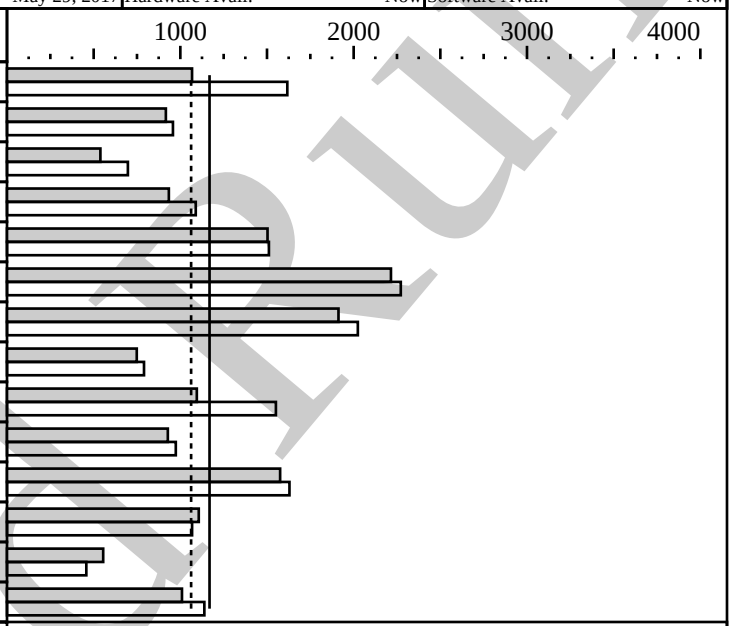

Hardware

CPU: ARMv7Processorrev3(v7l)
CPU MHz:
FPU: Integrated
CPU(s) enabled: 8
CPU(s) orderable:
Parallel: No
Primary Cache:
Secondary Cache:
L3 Cache:
Other Cache:
Memory: 2038764kB
Disk Subsystem:
Other Hardware:

Software

Operating System: Linux 3.10.82-39
Compiler: gcc version 8.0.0 20170530 (experimental) (GCC)
File System:
System State: multiuser

Notes/Tuning Information

```
Base flags: -O2
Peak flags: -Ofast -flto -mtune=native
```

Errors

'reportable' flag not set during run

Invalid Run