CFP2000 Result

Copyright ©1999-2000, Standard Performance Evaluation Corporation

--

SPECfp2000 = 1175

SPECfp_base2000 = 1061

SPEC license #00407	Tested by: Vladimir Makarov	Test date: Jun 03, 2017	Hardware Avail: Now	Software Avail: Now

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	149	1071	99.2	1613
171.swim	3100	338	918	322	964
172.mgrid	1800	332	542	257	699
173.applu	2100	226	928	193	1090
177.mesa	1400	93.2	1501	92.0	1522
178.galgel	2900	130	2228	126	2300
179.art	2600	137	1893	129	2017
183.equake	1300	175	745	155	836
187.facerec	1900	174	1094	123	1545
188.ammp	2200	238	926	227	970
189.lucas	2000	127	1577	122	1642
191.fma3d	2100	191	1102	198	1063
200.sixtrack	1100	198	555	239	460
301.apsi	2600	258	1007	229	1137

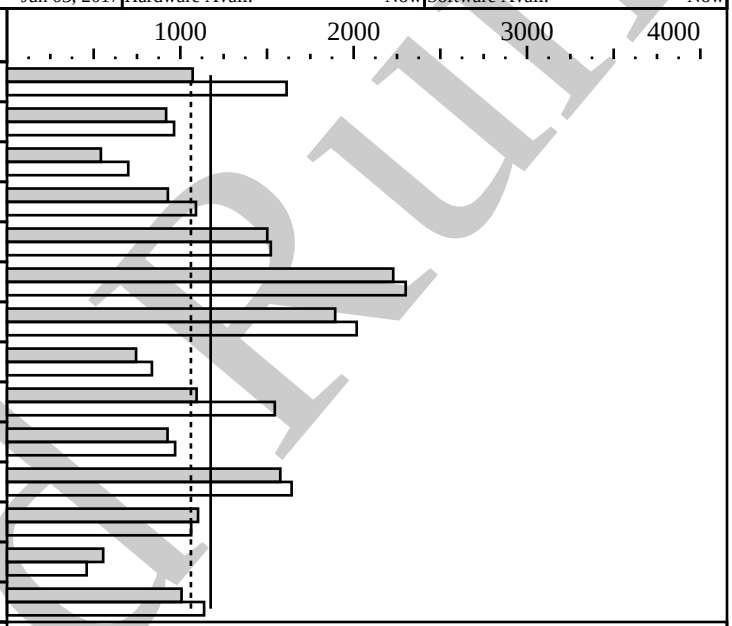

Hardware

CPU:	ARMv7Processorrev3(v7l)
CPU MHz:	
FPU:	Integrated
CPU(s) enabled:	8
CPU(s) orderable:	
Parallel:	No
Primary Cache:	
Secondary Cache:	
L3 Cache:	
Other Cache:	
Memory:	2038764kB
Disk Subsystem:	
Other Hardware:	

Software

Operating System:	Linux 3.10.82-39
Compiler:	gcc version 8.0.0 20170604 (experimental) (GCC)
File System:	
System State:	multiuser

Notes/Tuning Information

```
Base flags: -O2
Peak flags: -Ofast -flto -mtune=native
```

Errors

'reportable' flag not set during run

Invalid Run